

# Map tiles

Patrick Brown

January 30, 2014

The following are some examples of maps produced with  
`mymap=openmap(x, path="something")`

```
1 plot (openmap(x,path=" osm "))
```



```
2 plot (openmap(x,path=" osm-no-labels "))
```



3 `plot (openmap(x,path=" osm-transport "))`



4 `plot (openmap(x,path=" bw-mapnik "))`



5 `plot RGB (openmap(x,path=" mapquest "))`






```
6 plot RGB (openmap(x,path=" mapquest-sat "))
```



```
7 plot (openmap(x,path=" landscape "))
```

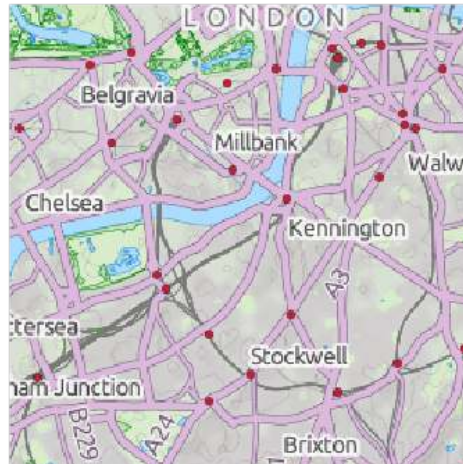

```
8 plot (openmap(x,path=" opentopomap "))
```

opentopomap is  
not currently  
available



9 `plot (openmap(x,path=" maptoolkit "))`



10 `plot (openmap(x,path=" waze "))`



11 `plot (openmap(x,path=" humanitarian "))`





12 `plot (openmap(x,path=" parking-bw "))`



13 `plot (openmap(x,path=" osm-locale-de "))`



14 `plot (openmap(x,path=" bw-noicons "))`



15 `plot (openmap(x,path=" osm-labels-en "))`




16 `plot (openmap(x,path=" osm-labels-fr "))`



17 `plot (openmap(x,path=" osm-labels-de "))`



18 plot (openmap(x,path=" osm-labels-it "))

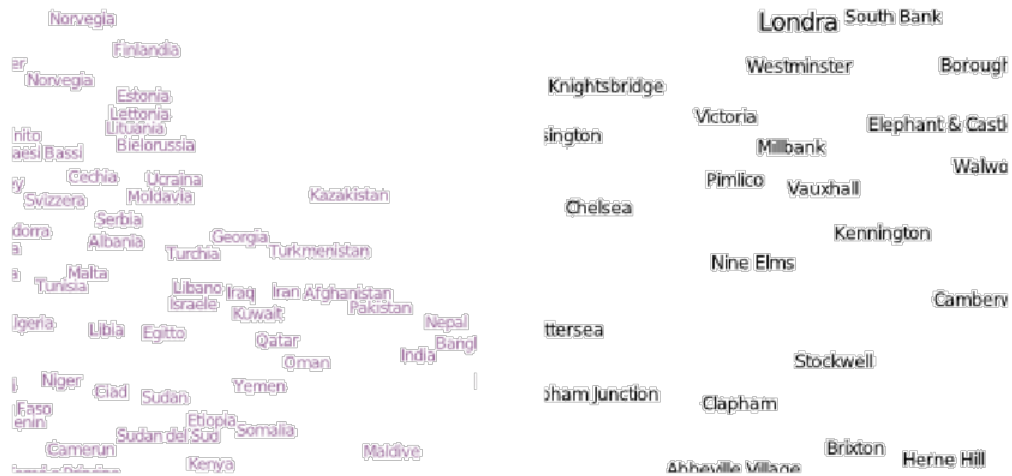


19 plot (openmap(x,path=" osm-labels-es "))



20 plot (openmap(x,path=" osm-labels-ru "))



```
21 plot (openmap(x,path=" stamen-toner "))
```

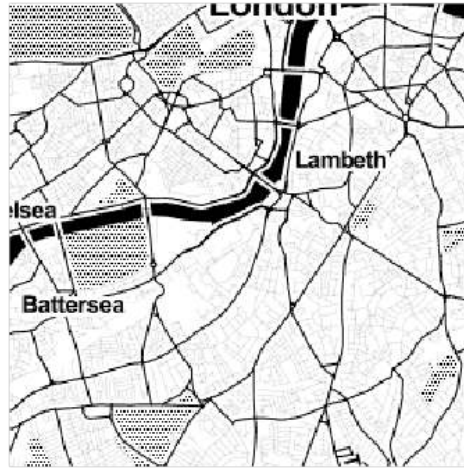

```
22 plot RGB (openmap(x,path=" stamen-watercolor "))
```

